

ROBERT E. BUSHNELL*†

HENRY M. ZYKORIE
JOSEPH G. SEEGER^o
JOHN C. BROSKY^o*
DARREN R. CREW⁺*
MATTHEW J. LESTINA[‡]*

MICHAEL D. PARKER
DANIEL A. GESELOWITZ, PH.D.
(REG. PATENT AGENTS)

† ADMITTED IN MARYLAND
° ADMITTED IN VIRGINIA
+ ADMITTED IN PENNSYLVANIA
‡ ADMITTED IN NEW YORK
* NOT ADMITTED IN D.C.

R. E. BUSHNELL

ATTORNEY AT LAW

1522 K STREET, N.W., SUITE 300
WASHINGTON, D.C. 20005-1202
UNITED STATES OF AMERICA

INTELLECTUAL PROPERTY LAW

TELEPHONE (202) 638-5740
(202) 408-9040
FACSIMILE (202) 628-0755
FACSIMILE (202) 289-7100
FACSIMILE (202) 628-3835
(410) 747-0022

E-MAIL: BUSHNELL@CWIXMAIL.COM

E-MAIL: REBUSHNELL@AOL.COM

September 1, 1999

- ☐ U.S. Postal Service
☐ Via Local Courier
☐ Via International Courier
☐ Via Facsimile No. _____
☐ Via E-Mail Attachment
☐ Please Acknowledge Receipt

Attorney Docket: P55824

The Assistant Commissioner of Patents
Washington, D.C. 20231

Sir:

Submitted herewith is the following patent application:

Inventor: Won-Woo CHOI

**Title: TRAY DRIVING APPARATUS FOR A MICROWAVE OVEN AND A
MICROWAVE OVEN HAVING THE SAME**

Please find attached hereto an application for patent which includes: Specification and Abstract, Claims, and a certified copy of the foreign priority document identified below:

Verified Showing of Small Entity Status: NO

Drawings: Formal drawings, 3 sheets, Figures 1 through 5

Claim of priority under 35 U.S.C. §119: YES

REPUBLIC OF KOREA Application No. 99-22930 filed in Korea on 18 June 1999.

Fee (see formula below): **CHECK IS ENCLOSED**

Basic Fee \$380/760 \$760.00

Additional Fees:

Total number of claims in excess of 20 _ times \$9/18. \$0.00

Number of independent claims

in excess of 3: _ times \$39/78 \$0.00

Multiple Dependent Claims \$130/260 \$0.00

An Assignment is likewise enclosed: Recording Fee \$40 .. \$0.00

Filing Non-English specification \$ 0.00

TOTAL FEES FOR THE ABOVE APPLICATION \$760.00

Assistant Commissioner of Patents
September 1, 1999
Page Two

Docket No.: P55824

Inventor: Won-Woo CHOI

**Title: TRAY DRIVING APPARATUS FOR A MICROWAVE OVEN AND A
MICROWAVE OVEN HAVING THE SAME**


Should the enclosed check become lost or detached from the file, the Commissioner is authorized to charge for any additional charges incurred, or credit any excess payment to the Deposit Account No. 02-4943. Kindly notify the undersigned attorney of any transaction regarding our Deposit Account.

In view of the above, it is requested that this application be accorded a filing date pursuant to 37 CFR 1.53(b).

Please address all correspondence to:

Robert E. Bushnell
1522 K Street, N.W.
Suite 300
Washington, D.C. 20005

Respectfully submitted,



Robert E. Bushnell
(Registration No. 27,774)

1522 K Street, N.W.
Suite 300
Washington, D.C. 20005
Telephone: (202) 638-5740
Telefacsimile: (202) 628-0755

Filio: P55824
Date: September 1, 1999
REB/xl

TRAY DRIVING APPARATUS FOR A MICROWAVE OVEN AND A MICROWAVE OVEN HAVING THE SAME

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention relates to a microwave oven for cooking food placed on a rotating tray by using a microwave, and more particularly, to a tray driving apparatus for a microwave oven and a microwave oven having the same for enhancing the cooking quality by periodically changing the rotational speed of the tray to much more evenly radiate a microwave to the food.

2. Description of the Prior Art

10 A microwave oven is a device for cooking food by using a microwave generated from a magnetron. The principle is that the microwave cooks food from its interior by heating molecules of water included in the food. The microwave oven is more widely used since the microwave oven has clear advantages in a higher thermal efficiency, more rapid heating, and less loss of nutrients.

15 Such a microwave oven, as shown in FIG. 1, has a cooking chamber 12 and a driving chamber 14 in the body 10. The cooking chamber 12 is a portion in which food is placed and cooked and on the front side of which a door is mounted to be opened and closed. A tray 16 for placing food is mounted on the bottom of the cooking chamber 12. The driving chamber 14 has various electric components and parts such a magnetron 17, a high voltage transformer

18, a waveguide, a cooling fan 19, and a control part to generate and radiate a microwave into the cooking chamber 12. A control panel 30 is prepared on the front side of the driving chamber 14 in order for a user to set various cooking modes and to operate the microwave oven.

If the electric components in the driving chamber 14 are operated, a microwave generated in the magnetron 17 is guided to the cooking chamber 12 through the waveguide 17. The microwave guided in the cooking chamber 12 is directly radiated to food or indirectly radiated to food while being reflected from the walls of the cooking chamber 12. The microwave radiated to food generates heat by vibrating water molecules of food. Then food is cooked by the generated heat.

In the meantime, in general, according to the shape of the cooking chamber 12, and the shape and size of food placed on the tray 16, the microwave distribution in the interior of the cooking chamber 12 changes, as well as continuously changing with respect to time. According to this, since the microwave is not evenly radiated to the entire food, the respective portions of food are differently cooked, thus the cooking quality is degraded.

In order to solve such a phenomenon, a general microwave oven has a tray driving apparatus for rotating the tray 16. It is experientially known that a microwave is more evenly radiated to food to enhance the cooking quality if food placed on the tray 16 is rotated by the tray driving apparatus.

Such a tray driving apparatus, as shown in FIG. 2, has a driving source 42, and a driving shaft 44 for transmitting the driving force to the tray 16. A general motor is used for a driving source, and a plurality of gears are included for reducing the number of rotations of

the motor which is rotated at a high speed, and for transmitting a driving force to the driving shaft 44.

If cooking starts, the driving source 42 generates a driving force, and the driving force is transmitted to the tray 16 through the driving shaft to slowly rotate the tray 16. According to this, food placed on the tray 16 is rotated at a predetermined speed, and the microwave is evenly radiated to food. Reference numeral 13 in FIG. 2 denotes the bottom panel of the body 10 which forms the bottom portion of the cooking chamber, and reference numeral 46 is a connection member which connects a shaft 44 with respect to the tray (or called rotary tray) 16.

In the meantime, if the tray is rotated at a constant speed, in the case that a microwave distribution with respect to time in the interior of the cooking chamber 12 changes according to the rotational speed of the tray 16, the respective portions of food are differently cooked due to the uneven radiation of the microwave to food even though the tray 16 is rotated. Accordingly, the cooking quality is deteriorated.

SUMMARY OF THE INVENTION

In order to solve the above problem, it is an object of the present invention to provide a tray driving apparatus for a microwave oven and a microwave oven having the same for enhancing the cooking quality of food by periodically changing the rotational speed of the tray and for more evenly radiating a microwave to food.

In order to achieve the above object, the tray driving apparatus of the microwave oven according to the present invention includes a driving source; a driving shaft rotated by the

driving source; a driven shaft connected to the tray and rotated together with the tray; and speed changing means for changing the rotational speed of the tray by changing the ratio of the rotational speed transmitted from the driven shaft to the driving shaft.

The speed changing unit includes a driving gear unit having a plurality of driving gears, and mounted to the driving shaft; and a driven gear unit having a plurality of driven gears corresponding to respective driving gears of the driving gear unit, and mounted to the driven shaft. The gears of any one of the driving gear unit and the driven gear unit are portion gears which are gears having gear teeth on respective portions of outer peripheries thereof, so that, upon a rotation of the driving shaft, each portion gear of any one of the driving gear unit and the driven gear unit are alternately meshed with a corresponding gear of the other one of the driving gear unit and the driven gear unit, to thereby change the rotational speed of the tray.

Accordingly, upon a rotation of the driving shaft, each portion gear of any one of the driving gear unit and the driven gear unit is alternately meshed with a corresponding gear of the other one of the driving gear unit and the driven gear unit, to thereby change the rotational speed of the tray.

Here, the gear teeth of each portion gear is formed on a plurality of portions of the outer periphery of each portion gear.

In the meantime, the above object can be achieved in the microwave oven according to the present invention which includes a body in which a cooking chamber is formed; a high frequency (or called 'microwave') generator for generating and radiating a high frequency into the interior of the cooking chamber; a tray mounted to be rotated on the bottom of the

cooking chamber in order for food to be securely placed; a driving source for providing a driving force for rotating the tray; a driving shaft rotated by the driving source; a driven shaft connected to the tray and rotated together with the tray; a driving gear unit having a plurality of driving gears and mounted to the driving shaft; and a driven gear unit having a plurality of driven gears corresponding to the plurality of driving gears, and mounted to the driven shaft.

According to this, the gears of any one of the driving gear unit and the driven gear unit are portion gears which are gears having gear teeth on respective portions of outer peripheries thereof, the gear teeth of the portion gears are alternately disposed to each other one on another.

Accordingly, upon a rotation of the driving shaft, each portion gear of any one of the driving gear unit and the driven gear unit are alternately meshed with a corresponding gear of the other one of the driving gear unit and the driven gear unit, to thereby change a rotational speed of the tray.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects and the advantages of the present invention will become readily apparent by reference to the following detailed description when considered in conjunction with the accompanying drawings in which:

FIG. 1 is a perspective view of a general microwave oven having a tray;

FIG. 2 is a cross-sectioned view of a conventional tray driving apparatus;

FIG. 3 is a cross-sectioned view of a tray driving apparatus according to the first embodiment of the present invention;

FIGS. 4A and 4B are plan views for showing operations of the tray driving apparatus of FIG. 3; and

FIG. 5 is a cross-sectioned view of a tray driving apparatus according to the second embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Hereinafter, the first embodiment of the present invention according to the present invention will be described in detail with reference to the accompanying drawings.

The microwave oven to which the tray driving apparatus according to the first embodiment of the present invention is applied has the same structure as in a general microwave oven as shown in FIG. 1. That is, the body is divided into a cooking chamber and a driving chamber. Various electric components in the driving chamber are mounted for generating and guiding the microwave into the cooking chamber. A tray for placing food is mounted on the bottom of the cooking chamber, a door is mounted on the front side of the cooking chamber, and a control panel is mounted on the front side of the driving chamber.

The tray driving apparatus according to the first embodiment of the present invention is mounted below the tray of the cooking chamber. FIGS. 3 to 4B show the tray driving apparatus according to the first embodiment of the present invention.

As shown in FIGS 3 to 4B, the tray driving apparatus according to the first embodiment of the present invention includes a driving source 112 for providing a driving force, a driving shaft 114 and a driven shaft 116 for transmitting the driving force of the driving source 112 to the tray 102, and speed changing gear unit for changing a rotational

speed of the tray 102 disposed between the driving shaft 114 and the driven shaft 116.

An electric motor is used as a driving source 112. The driving shaft 114 is connected to a rotator of the electric motor 114, and the driven shaft 116 is connected to the center portion of the lower bottom of the tray 102. Reference numeral 103 is a bottom panel forming the bottom side of the cooking chamber.

5 The speed changing gears include a driving gear unit 121 which are mounted to the driving shaft 114 and driven gear unit 125 mounted to the driven shaft 116.

10 The driving gear unit 121 has the first driving gear 122 and the second driving gear 124, which are portion gears alternately meshed to each other. The portion gears in the present description are gear tooth portions partially formed on the outer periphery of a gear, not entirely formed on the outer periphery. Gear teeth of the first and second driving gear 122 and 124, as shown in FIG. 4A, are formed along half the entire outer periphery, that is, from 0 degree to 180 degree along the outer periphery, of each of the gears 122 and 124, which are alternately disposed one on another.

15 The driven gear unit 125 has the first driven gear 126 and the second driven gear 128, respectively, corresponding to the first driving gear 122 and the second driving gear 124 of the driving gears.

20 If the cooking begins, the driving shaft 114 of the driving source 112 is rotated. The driving force of the driving shaft 114 is transmitted to the driven shaft 116 to rotate the tray 102. At this time, the rotational force of the driving shaft 114 is alternately transmitted to the driven shaft 116 through the first gears 122 and 126 and the second gears 124 and 128 of the driving gear unit 121 and the driven gear unit 125. Accordingly, the rotational speed of the

tray 102 rotated by the driven shaft 116 is periodically changed.

That is, in the state that the first driving gear 122 of the driving gear unit 121 is meshed with the first driven gear 126 of the driven gear unit 125, the second driving gear 124 is in a separated state from the second driven gear 128. Accordingly, the driving force of the driving shaft 114 is transmitted to the driven shaft 116 through the first driving gear 122 and the first driven gear 126, and the tray 102 is rotated at a speed corresponding to the ratio of the first gears 122 and 126.

Here, in the state that the first driving gear 122 is meshed with the first driven gear 126, the driving shaft 114 is rotated up to 180 degrees, the driven shaft 116 is rotated up to an angle of α corresponding to the length of a (more precisely the number of gear teeth) which corresponds to one half of the outer periphery of the first driving gear 122 on the outer periphery of the first driven gear 126.

If the driving shaft 114 is rotated up to 180 degrees, the first driving gear 122 is separated from the first driven gear 126, at the same time, the second driving gear 124 is meshed with the second driven gear 128, so that the driving force of the driving shaft 114 is, as shown in FIG. 4b, transmitted to the driven shaft 116 through the second driving gear 124 and the second driven gear 128, and the tray 102 is rotated at a speed corresponding to the gear tooth ratio of the second gears 124 and 128. Here, The driving shaft 114 is rotated 180° in the state that the second driving gear 124 is meshed with the second driven gear 128, and the driven shaft 116 is rotated at an angle of β corresponding to the length of b (more precisely the number of gear teeth) corresponding to the length which corresponds to half of the outer periphery of the second driving gear 124 on the outer periphery of the second driven gear 128.

As stated above, while the driving shaft 114 is rotated one time, the driving force of the driving shaft 114 is alternately transmitted to the driven shaft 116 via the first gears 122 and 126 and the second gears 124 and 128 of the driving gear unit 121 and the driven gear unit 125, so that the rotational speed of the tray 102 is periodically changed.

In the meantime, the driving gears and the driven gears of the driving gear unit 121 and the driven gear unit 125 are not defined to only two gears, respectively, as in the first embodiment, but can contain three to four or more gears if necessary when designed. If three gears are used for the respective gear units, the rotational speed of the tray 102 is changed in three steps.

Although the gear teeth are formed on each of the driving gears of the driving gear unit 121 on only one portion of the periphery thereof in the first embodiment, the gear teeth may be also formed on two or more portions of the periphery thereof, and in the latter case, the gear teeth of respective driving gears should be alternately meshed to each other without any interruption between them.

Preferably, when the driving shaft 114 is rotated one time, that is, rotated 360° , an angle at which the driven shaft 116 is rotated, that is, $\alpha + \beta$ or the integer times of the $\alpha + \beta$ equals to 360° or is different from 360° . Therefore, the rotational speed of the tray 102 at a particular position in the cooking chamber in which the tray 102 is rotated is continuously changed. Accordingly, the microwave is more evenly radiated to food.

In the meantime, FIG. 5 is a cross-sectioned view for showing a tray driving apparatus according to the second embodiment of the present invention.

The tray driving apparatus according to the second embodiment of the present invention

includes a driving source 132 for providing a driving force, a driving shaft 134 and a driven shaft 136 for transmitting a driving force of the driving source 132 to the tray 102', and a speed changing gear unit for changing the rotational speed of the tray 102' disposed between the driving shaft 134 and the driven shaft 136. The speed changing gear unit includes a driving gear unit 141 which has a first driving gear 142 and a second driving gear 144, and a driven gear unit 145 which has a first driven gear 146 and a second driven gear 148.

However, in the second embodiment of the present invention, the first and second driven gears of the driven gear unit 145 have portion gears, respectively.

In the second embodiment of the present invention as stated above, as in the first embodiment, the rotational force of the driving shaft 134 is alternately transmitted through the first gears 142 and 146 and the second gears 144 and 148 of the driving gear unit 141 and the driven gear unit 145. However, since the first and second gears 146 and 148 of the driven gear unit 145 have portion gears, respectively, the period of a speed change is exactly 180°.

Accordingly, the rotational speed of the tray 102' at a particular position in the cooking chamber in which the tray 102' is rotated is the same all the time. Accordingly, it is expected that the efficiency in an even radiation of a microwave with respect to food is lower than that in the first embodiment of the present invention.

Further, in the second embodiment of the present invention as shown in FIG. 5, it is obvious as in the first embodiment that the number of the driven gears of the driven gear unit 145 is over two, and gear teeth of each of the driven gears are formed on two or more portions of the outer periphery thereof.

In the tray driving apparatus of a microwave oven according to the present invention as

stated above, since a driving force transmitted from the driving shaft to the driven shaft is periodically changed by the speed changing unit, the rotational speed of the tray is periodically changed. Accordingly, compared to a conventional microwave oven in which the tray is constantly rotated, a microwave is more evenly radiated to food, so that a cooking quality for food is much more enhanced.

5

As stated above, a preferred embodiment of the present invention is shown and described. Although the preferred embodiment of the present invention has been described, it is understood that the present invention should not be limited to this preferred embodiment, but various changes and modifications can be made by one skilled in the art within the spirit and scope of the present invention as hereinafter claimed.

WHAT IS CLAIMED IS:

1. A tray driving apparatus of a microwave oven, comprising:

a driving source for rotating the tray disposed in the cooking chamber of a microwave oven;

a driving shaft rotated by the driving source;

5 a driven shaft connected to the tray and rotated together with the tray; and

speed changing means for changing the rotational speed of the tray by changing the ratio of the rotational speed transmitted from the driven shaft to the driving shaft.

2. The tray driving apparatus of a microwave oven as claimed in claim 1, wherein the speed changing means includes:

a driving gear unit having a plurality of driving gears, and mounted to the driving shaft; and

a driven gear unit having a plurality of driven gears corresponding to respective driving gears of the driving gear unit, and mounted to the driven shaft;

15 wherein gears of any one of the driving gear unit and the driven gear unit are portion gears which are gears having gear teeth on respective portions of outer peripheries thereof, so that, upon a rotation of the driving shaft, each portion gear of any one of the driving gear unit and the driven gear unit are alternately meshed with a corresponding gear of the other one of the driving gear unit and the driven gear unit, to thereby change the rotational speed of the
20 tray.

3. The tray driving apparatus of a microwave oven as claimed in claim 2, wherein the gear teeth of each portion gear are formed on a plurality of portions of the outer periphery of each portion gear.

4. A microwave oven, comprising:

5 a body in which a cooking chamber is formed;

a high frequency generator for generating and radiating a high frequency into the interior of the cooking chamber;

a tray mounted to be rotated on the bottom of the cooking chamber in order for food to be securely placed;

10 a driving source for providing a driving force for rotating the tray;

a driving shaft rotated by the driving source;

a driven shaft connected to the tray and rotated together with the tray;

a driving gear unit having a plurality of driving gears and mounted to the driving shaft;

and

15 a driven gear unit having a plurality of driven gears corresponding to the plurality of driving gears, and mounted to the driven shaft;

wherein gears of any one of the driving gear unit and the driven gear unit are portion gears which are gears having gear teeth on respective portions of outer peripheries thereof, so that, upon a rotation of the driving shaft, each portion gear of any one of the driving gear unit and the driven gear unit is alternately meshed with a corresponding gear of the other one of the driving gear unit and the driven gear unit, to thereby change the rotational speed of the tray.

ABSTRACT OF THE DISCLOSURE

A tray driving apparatus for a microwave oven and a microwave oven having the same including a speed changing unit for enhancing the cooking quality by periodically changing the rotational speed of the tray to more evenly radiate a microwave to food. The speed changing means includes a driving gear unit having a plurality of driving gears and mounted to the driving shaft; and a driven gear unit having a plurality of driven gears corresponding to
5
respective driving gears of the driving gear unit, and mounted to the driven shaft. The gears of any one of the driving gear unit and the driven gear unit are portion gears which are gears having gear teeth on respective portions of outer peripheries thereof, the gear teeth of the portion gears are alternately disposed to each other one on another. Accordingly, upon a
10
rotation of the driving shaft, each portion gear of any one of the driving gear unit and the driven gear unit are alternately meshed with a corresponding gear of the other one of the driving gear unit and the driven gear unit, to thereby change the rotational speed of the tray.

FIG. 1
(PRIOR ART)

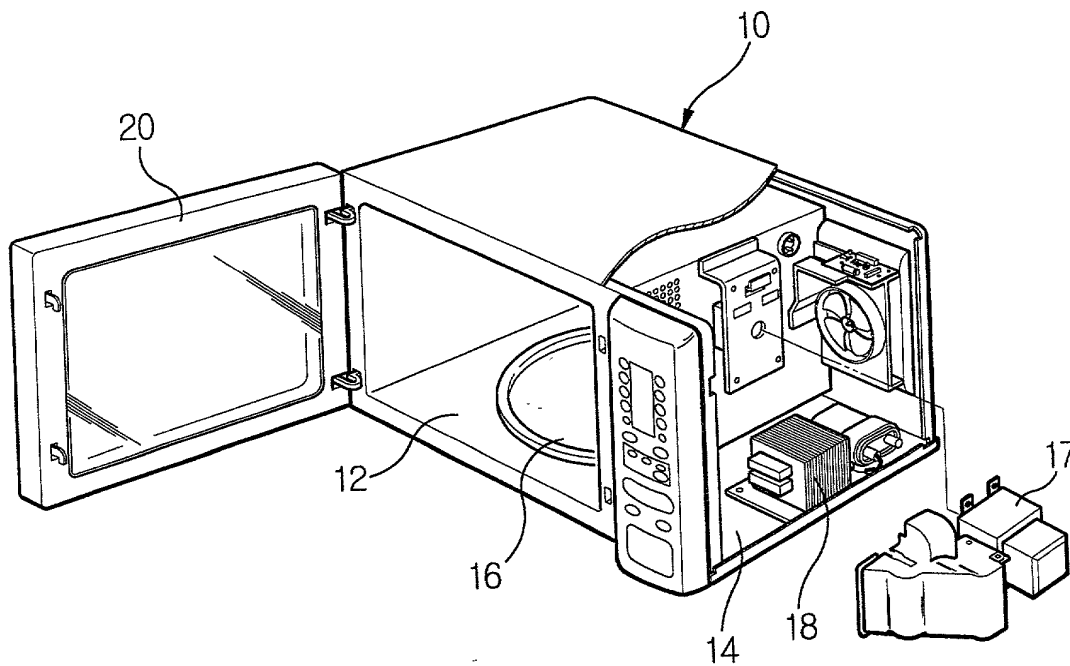


FIG. 2
(PRIOR ART)

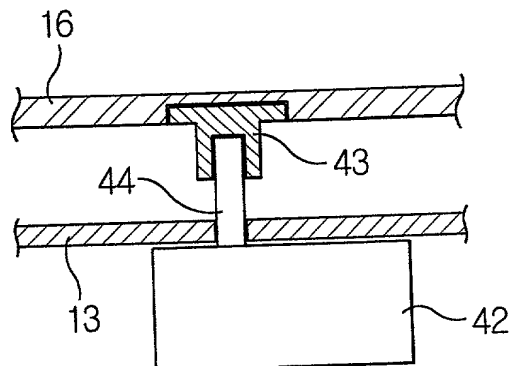


FIG.3

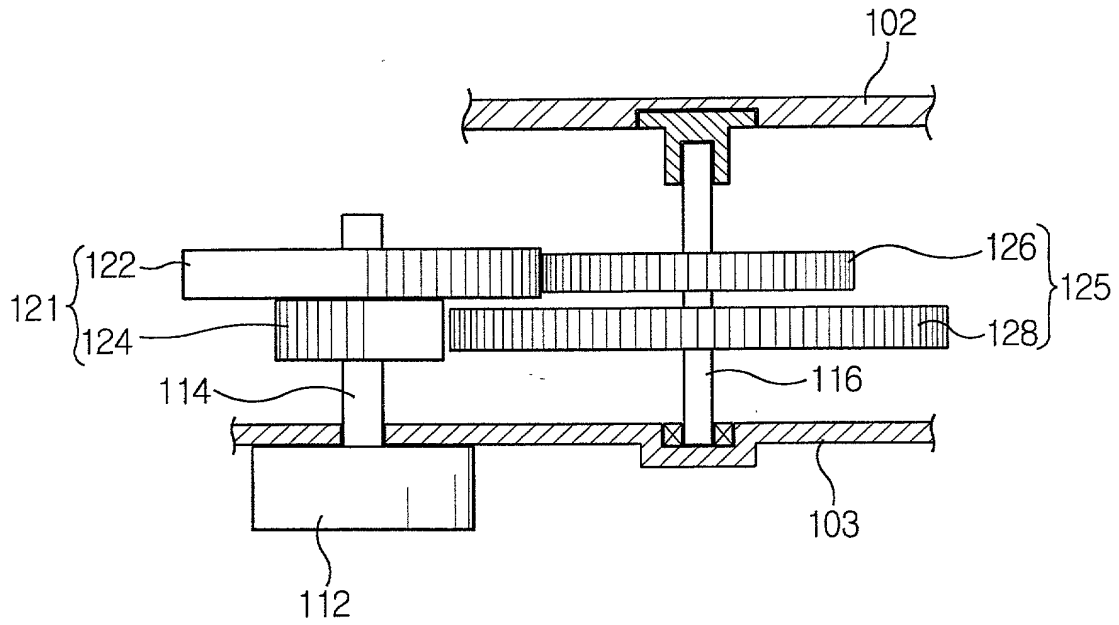


FIG.4A

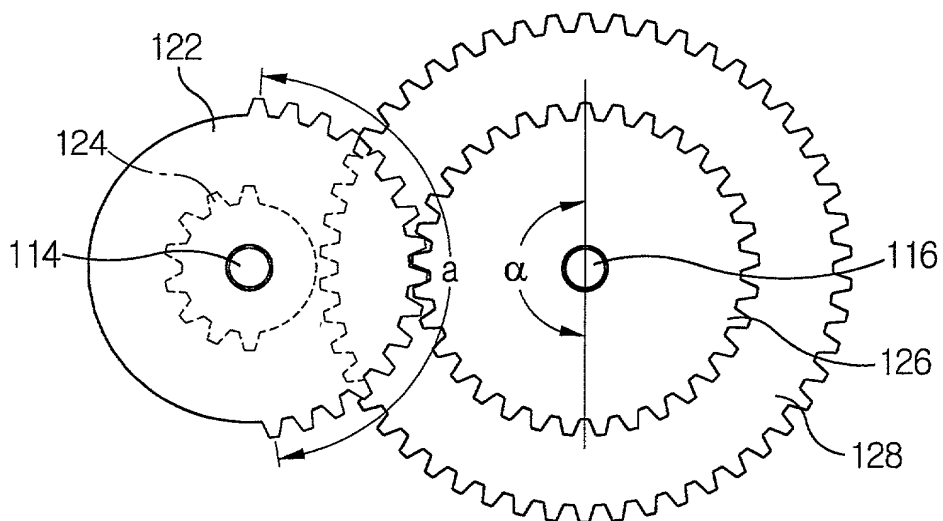


FIG.4B


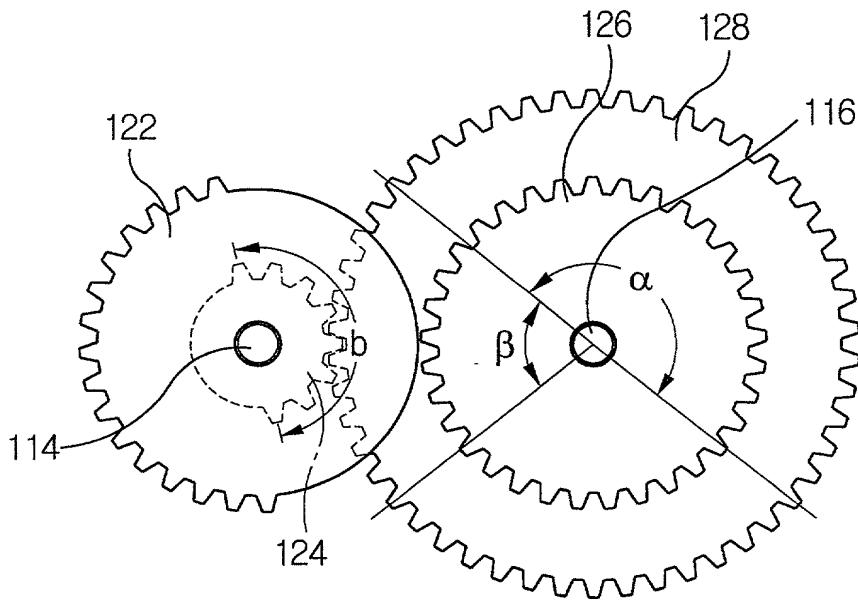


FIG.5

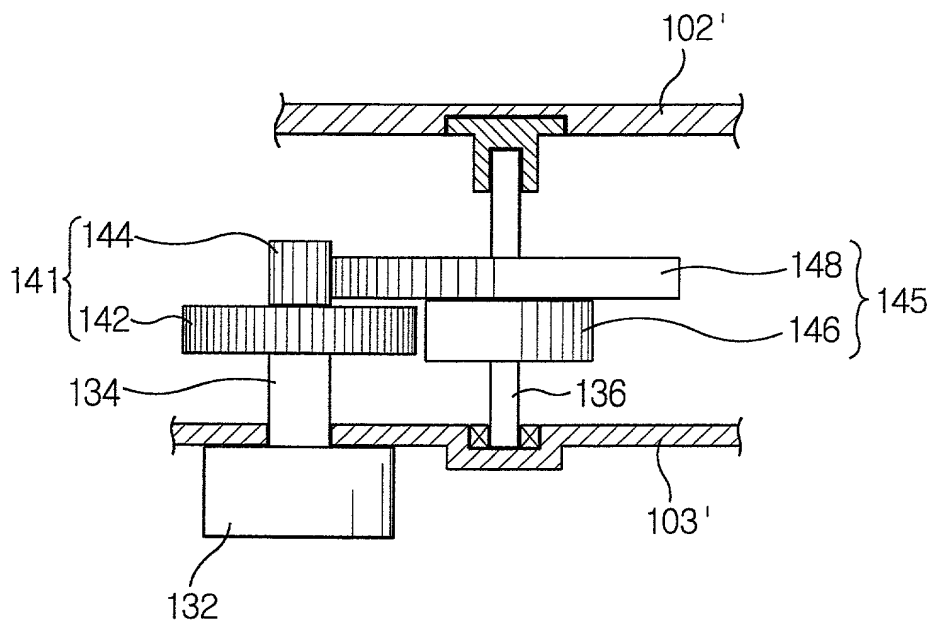

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Won-Woo CHOI

Serial No.: *To Be Assigned*

Examiner: *To Be Assigned*

Filed: 1 September 1999

Art Unit: *To Be Assigned*

For: *TRAY DRIVING APPARATUS FOR A MICROWAVE OVEN AND A
MICROWAVE OVEN HAVING THE SAME*


TRANSMITTAL OF DECLARATION

The Assistant Commissioner
of Patents
Washington, D.C. 20231

Sir:

Accompanying this transmittal is a Declaration for the above-referenced application.

Respectfully submitted,



Robert E. Bushnell
Reg. No.: 27,774
Attorney for the Applicant

1522 "K" Street, N.W., Suite 300
Washington, D.C. 20005-1202
(202) 638-5740

Folio: P55824
Date: 9/1/99
I.D.: REB/xl

DECLARATION

PTO/SB/01(6/95)

Docket No. P55824

AS A BELOW NAMED INVENTOR, I hereby declare that :

My residence, post office address and citizenship are as stated next to my name.

I believe that I am the original, first and sole(if only one name is listed below), or an original, first and joint inventor(if plural name are listed below), of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE: TRAY DRIVING APPARATUS FOR A MICROWAVE OVEN AND A MICROWAVE OVEN HAVING THE SAME

the specification of which either is attached hereto or otherwise accompanies this Declaration, or:

☐ was filed in the U.S. Patent & Trademark Office on _____ and assigned Serial No. _____☐ and (if applicable) was amended on _____

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability and to the examination of this application in accordance with Title 37 of the Code of Federal Regulations §1.56. I hereby claim foreign priority benefits under Title 35, U.S. Code §119 (a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, or §119(e) of any United States provisional application(s), listed below and have also identified below any foreign applications for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

P99-22930	KOREA	18/06/1999	Priority Claimed:
(Application Number)	(Country)	(Day/Month/Year filed)	Yes[X] No[]
(Application Number)	(Country)	(Day/Month/Year filed)	Yes[] No[]
(Application Number)	(Country)	(Day/Month/Year filed)	Yes[] No[]

I hereby claim the benefit under Title 35, U.S. Code, §120, of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application application(s) in the manner provided by the first paragraph of Title 35, U.S. Code, §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, The Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(STATUS : patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(STATUS : patented, pending, abandoned)

I hereby appoint the following attorneys: Robert E. Bushnell, Reg. No. 27,774, and Michael D. Parker, Reg. No. 34,973, to prosecute this application and to transact all business in the U.S. Patent & Trademark Office connected therewith and with any divisional, continuation, continuation-in-part, reissue or re-examination application, with full power of appointment and with full power to substitute an associate attorney or agent, and to receive all patents which may issue thereon, and request that all correspondence be addressed to:

Robert E. Bushnell,
Attorney-at-Law
1522, "K" Street, N.W., Suite 300
Washington, D.C. 20005-1202

Payer No. 008439
Area Code: 202-638-5740

I HEREBY DECLARE that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 U.S. Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST OR SOLE INVENTOR: Won-woo CHOI Citizenship : KOREANinventor's signature:  Date: June 28, 1999
Residence & Post Office Address: 513-404, Daewon Apartment, Kweonsun-dong, Kweonsun-gu,
Suwon-city, Kyungki-do, Korea

FULL NAME OF SECOND JOINT INVENTOR: _____ Citizenship : _____

inventor's signature: _____ Date: _____
Residence & Post Office Address: _____

FULL NAME OF THIRD JOINT INVENTOR: _____ Citizenship: _____

Inventor's signature: _____ Date: _____
Residence & Post Office Address: _____